




Afterglow Wireless PS3 Controller Battery Replacement

This guide will show the steps in replacing the battery in a PS3 Wireless Afterglow Controller.

Written By: Aj Coello

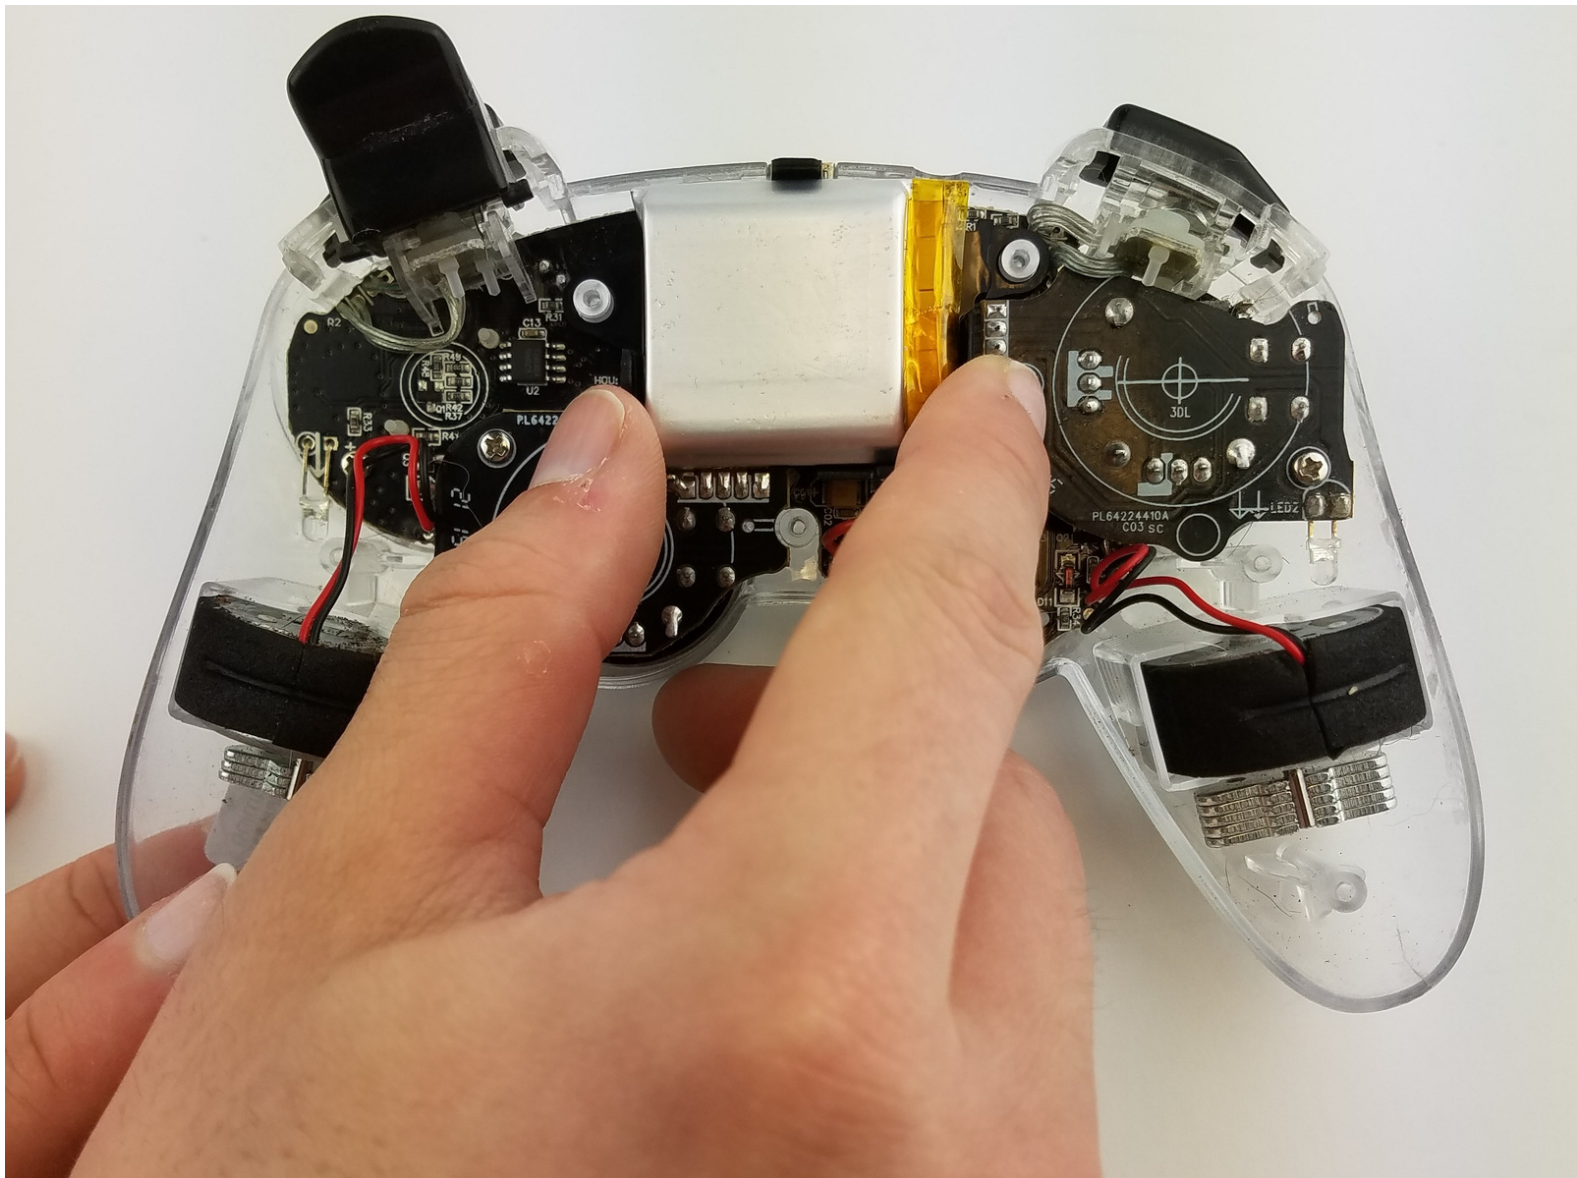

INTRODUCTION


Replacing the battery in a PS3 Wireless Afterglow Controller requires the removal of the back plate and then the soldering of the battery wires onto the motherboard.



TOOLS:


- [64 Bit Driver Kit](#) (1)
 - [Soldering Station](#) (1)
-

Step 1 — Back Cover

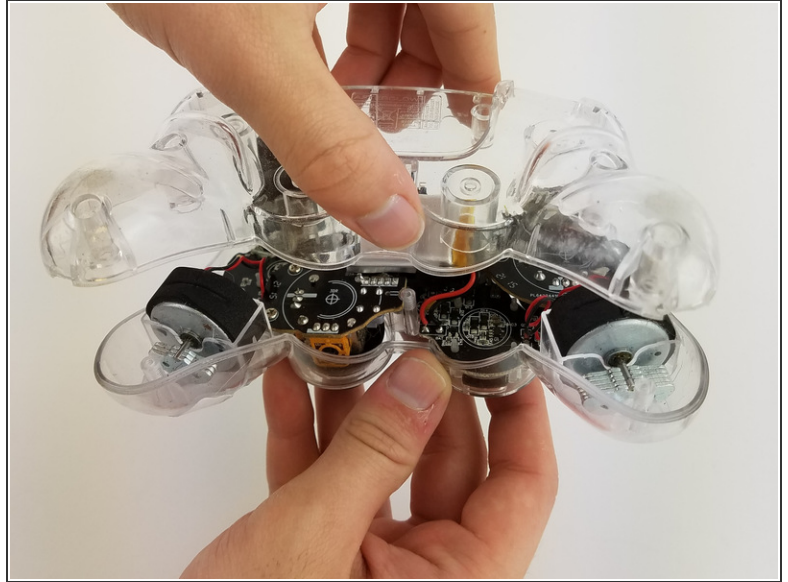


- Lay the controller face down on a flat surface and remove the seven 9mm Phillips #0 screws on the back of the controller.
- Lift up and remove the controller back plate.

Step 2 — Battery

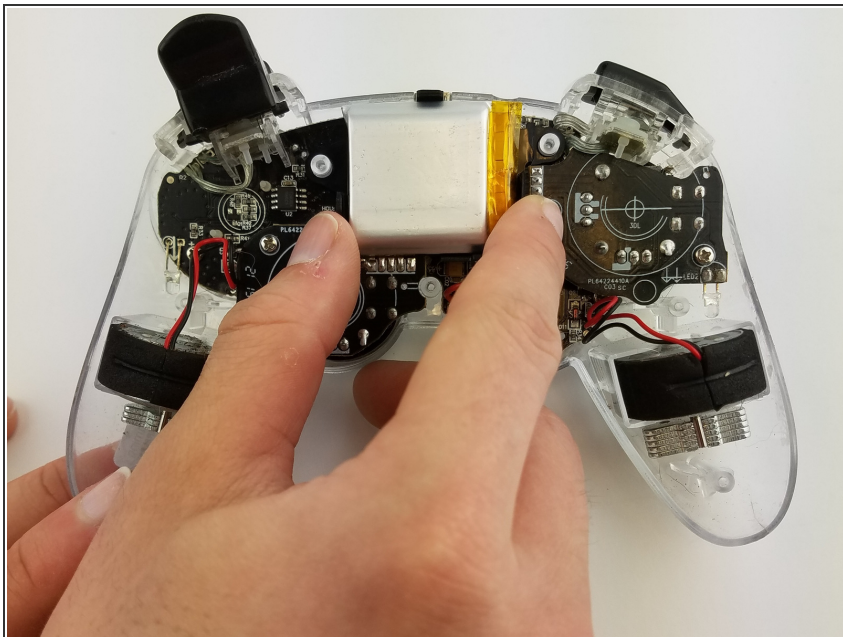

- Carefully remove the battery by lifting it straight up from its place.
- ⚠ Keep in mind that the red and black battery wires are attached to the motherboard. Handle these with care.

Step 3

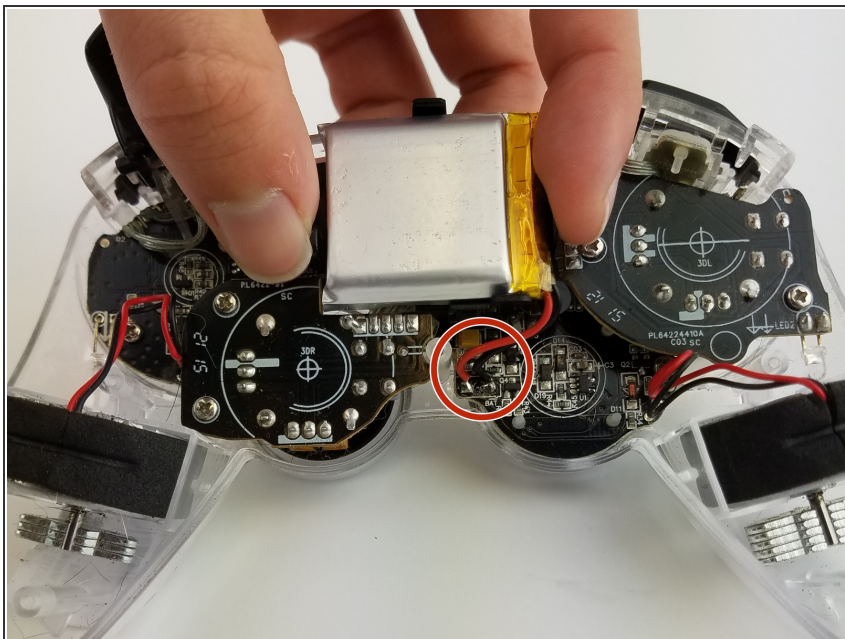

- Use the soldering tool to heat the solder connecting the battery wires to the motherboard.
- ⓘ The soldering gun will loosen the bonds of the solder allowing the wires to be detached. Use [this guide](#) for further details on how to solder.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-11-02 05:48:24 AM.